

SOĞUTUCU



SULU SOĞUTUCULAR



OR

MAXTOR SULU SOĞUTUCULARI	$\Delta T=20^{\circ}\text{C}$ de	$\Delta T=30^{\circ}\text{C}$ de	Maks. Yağ	Maks. Basınç	Yağ-Su bağlantı	Fiyat
	soğutma kcal/saat	kcal/saat	debisi lt/dak	Bar	Ölçüsü	EU/Ad
OR-60 L	4.200	7.000	60	10	3/4" - 3/4"	
OR-100 L	7.500	12.000	100	10	3/4" - 3/4"	
OR-150 L	12.000	19.000	150	10	1 1/4" - 3/4"	
OR-250 L	18.000	30.000	250	10	1 1/4" - 3/4"	
OR-350 L	24.000	40.000	350	10	1 1/4" - 3/4"	
OR-600 L	42.000	62.000	600	10	2" - 1 1/2"	
OR-800 L	60.000	90.000	800	10	2" - 1 1/2"	

Su girişleri yandan, yağ girişleri üstendir.

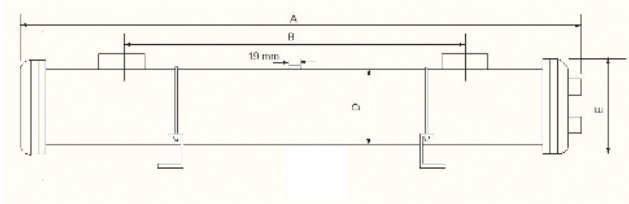



MODEL	A	B	C	D	E	F	G	Boru	Akış	Ağırlık			
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	Sayısı	lt/dak	(kg)			
M-OR-60L	465	295	40	89,10	120	3/4"	3/4"	22	60	8			
M-OR-100L	540	370	55	114,30	140			26	100	12			
M-OR-150L	580	375	65	139,80	170	1 1/4"		42	150	15			
M-OR-250L	800	600					58	250	22				
M-OR-350L	1205	1000								350	30		
M-OR-600L	1225	970	85	165,20	196	2"				1 1/2"		600	40
M-OR-800L	1725	1470										800	50
M-OR-1000L	2140	1890										1000	60
M-OR-1200L	2520	2270										1200	70

Maxtor Sulu Yağ Soğutucu Maxtor Watery Oil Cooler

**MAXTOR SULU YAĞ SOĞUTUCULARININ
3 YILDIR YÜKSEK KALİTE, UYGUN FİYAT ve
STOKTAN DERHAL TESLİM ÖZELLİKLERİYLE
BİRÇOK FİRMANIN TERCİHİ OLDUĞUNU
BİLİYORMUYDUNUZ ?**



TEKNİK VERİLER / TECHNICAL DATA

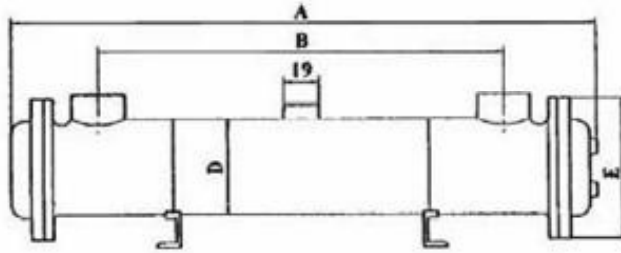

Maxtor oil cooler

Model	A mm	B mm	C mm	D mm	E mm	F	G	Exchange tube	Flow l/min	Weight kg
OR - 60L	465	295	40	89.1	120	3/4"	3/4"	22	60	8
OR - 100L	540	370	55	114.3	140	3/4"	3/4"	26	100	12
OR - 150L	580	375	65	139.8	170	1 1/4"	3/4"	42	150	15
OR - 250L	800	600	65	139.8	170	1 1/4"	3/4"	58	250	22
OR - 350L	1205	1000	65	139.8	170	1 1/4"	3/4"	58	350	30
OR - 600L	1225	970	85	165.2	196	2"	1 1/2"	58	600	40
OR - 800L	1725	1470	85	165.2	196	2"	1 1/2"	58	800	50
OR - 1000L	2140	1890	85	165.2	196	2"	1 1/2"	58	1000	60
OR - 1200L	2520	2270	85	165.2	196	2"	1 1/2"	58	1200	70

Tip / Type	Δt	Kapasite / The Capacity	Δt	Kapasite / The Capacity
OR-60 L	30° C	7.000 kcal/h	20° C	4.200 kcal/h
OR-100 L	30° C	12.000 kcal/h	20° C	7.500 kcal/h
OR-150 L	30° C	19.000 kcal/h	20° C	12.000 kcal/h
OR-250 L	30° C	30.000 kcal/h	20° C	18.000 kcal/h
OR-350 L	30° C	40.000 kcal/h	20° C	24.000 kcal/h
OR-600 L	30° C	62.000 kcal/h	20° C	42.000 kcal/h
OR-800 L	30° C	90.000 kcal/h	20° C	60.000 kcal/h
OR-1000 L	30° C	115.000 kcal/h	20° C	78.000 kcal/h
OR-1200 L	30° C	135.000 kcal/h	20° C	92.000 kcal/h

Verim Eğrileri / Performance Curves

